




- UFT (Ultra Fine Touch) Technology
- myViewBoard™ digital whiteboard software
- ViewBoard® Cast 4-way split screen content sharing software
- SmartPort™ shared front USB ports for internal & external PCs
- 2.0 Stereo sound

The ViewBoard® IFP50 series embraces UFT (Ultra Fine Touch) Technology to offer more precise writing and faster processing time than traditional IR panels. Smooth, dual-pen writing with our new, slim 2.5mm pens enables groups of teachers and students to work efficiently on any detailed tasks that require the use of accurate, fine tipped pens. The ViewBoard® IFP50 series is designed with a slim bezel to broaden your viewing experience so that even at the edge you can write clearly and confidently. Integrated myViewBoard™ digital whiteboarding software allows users to collaborate on the go, while ViewBoard® Cast provides 4-way, split screen content sharing.

## UFT Technology

UFT Technology enables precision writing with a 2.5mm diameter pen tip.

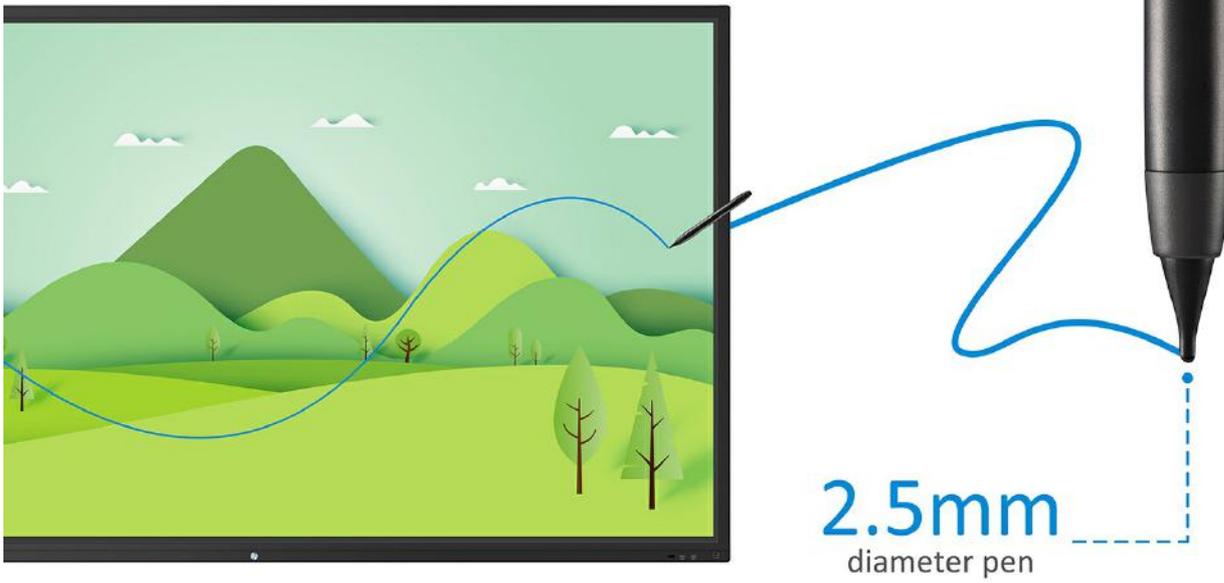

## Dual-Pen

Automatically detect pen diameter (8mm & 2.5mm) and write simultaneously with different colours and thicknesses.




## Full Native Performance on embedded OS

Built-in myViewBoard™ digital whiteboarding software to collaborate on the go.



## 4-way Split Screen

4-way split screen content sharing with built-in ViewBoard® Cast software.

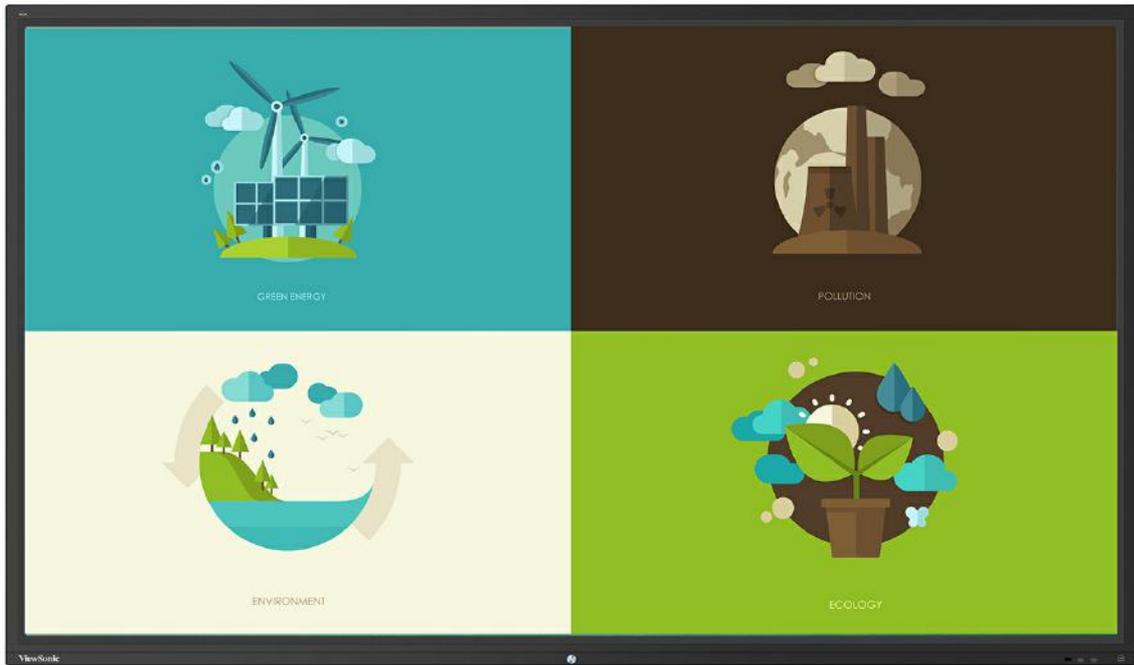

## Shared USB Ports

SmartPort™ shared front USB ports for internal & external PCs.



## Stereo Sound

2.0 Stereo sound



## Faster Internet

GigaLAN provides a faster, more powerful internet connection.

GigaLAN




## Remote Control

Built-in RS232 port and vController software for remote control.



## Slot-in PC

Slot-in PC with Intel 8th-gen CPU (Optional).

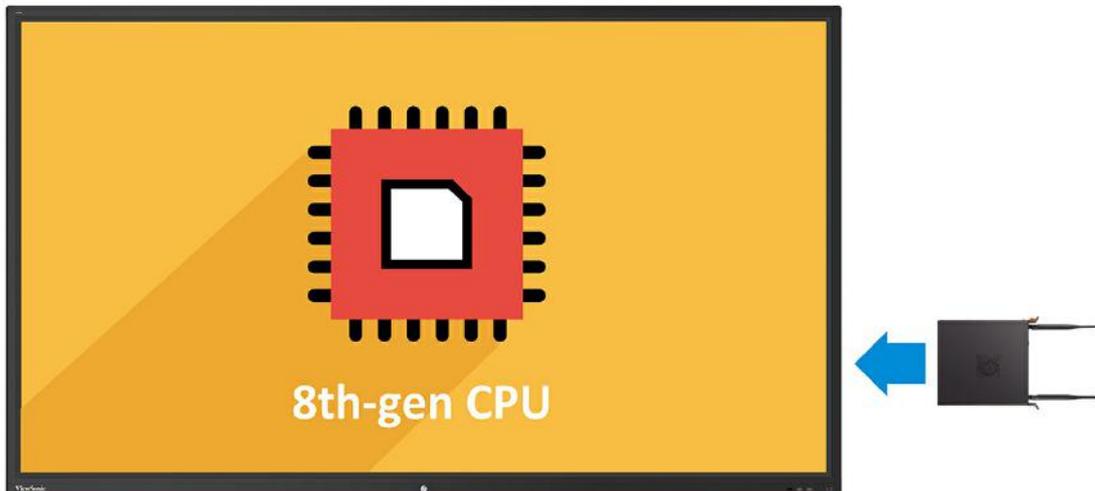


## Web Camera

Top-mounted 1080p web camera (Optional).



## I/O Ports

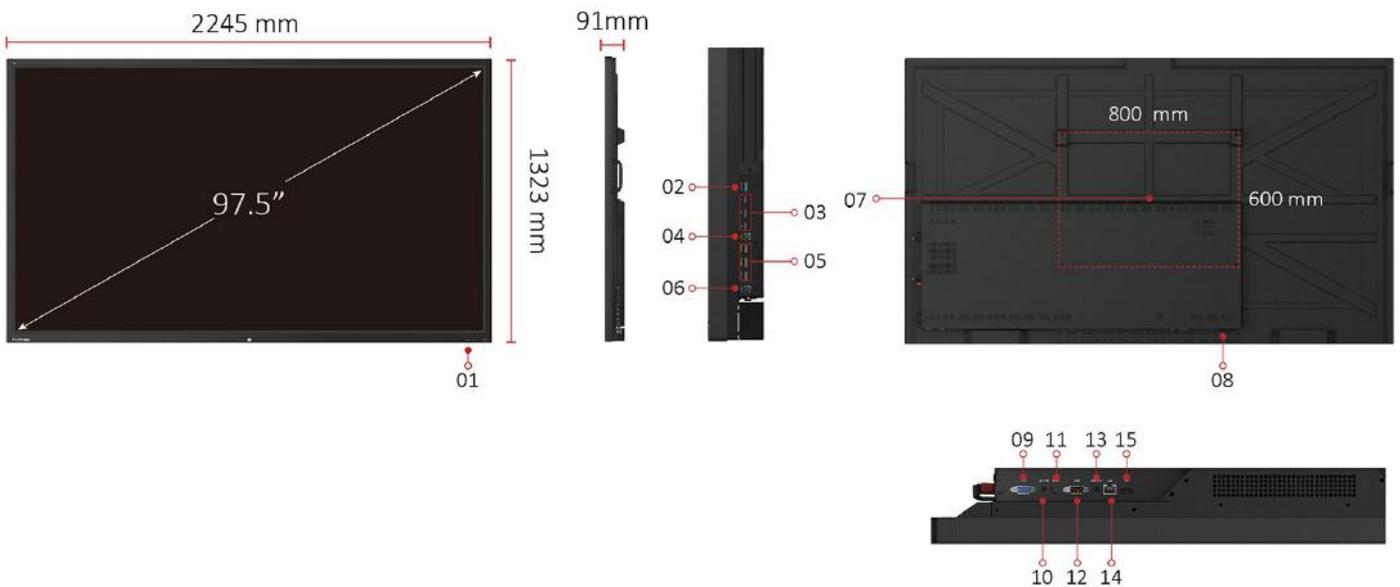

1. USB 2.0 X 2
2. HDMI OUT
3. USB 3.0 X 3
4. USB Touch Port
5. HDMI In X 3
6. USB Touch Port
7. VESA® WALL Mount 800x600 mm
8. AC IN
9. VGA
10. AUDIO IN
11. SPDIF Out
12. RS232
13. AUDIO OUT

- 14. LAN
- 15. USB 2.0

## Technical Specifications

<b>Display</b>	<b>Panel Size</b>	98"
	<b>Type/Tech</b>	TFT LCD Module with DLED Backlight.
	<b>Display Area (mm)</b>	2171.85(H) x 1232.35(V) (97.52"diagonal)
	<b>Aspect Ratio</b>	16:9
	<b>Native Resolution</b>	UHD 3840x2160(Pixels)
	<b>Colours</b>	1.07B colours (10bit)
	<b>Brightness</b>	350 nits (typ.)
	<b>Contrast Ratio</b>	1200:1 Typ. , 5000:1 Max.
	<b>Response Time</b>	6ms
	<b>Viewing Angles</b>	H = 178, V = 178 typ.
	<b>Backlight Life</b>	30,000 Hours (Min)
	<b>Surface Treatment</b>	Anti-Glare
<b>Orientation</b>	Landscape	
<b>Platform</b>	<b>Processor</b>	ARM Cortex A73*2(1.5GHz)+A53*2(1.2GHz)
	<b>RAM</b>	3GB DDR4
	<b>Storage</b>	16GB
<b>Touch</b>	<b>Type/ Tech</b>	IR Recognition
	<b>Touch Resolution</b>	32767 x 32767
	<b>Touch Point</b>	20 points touch, 10 points writing
<b>INPUT</b>	<b>HDMI</b>	2.0 x3 (3840x2160 @60Hz)
	<b>RGB / VGA</b>	x1
	<b>Audio</b>	x1 (PC audio in)
	<b>RS232</b>	x1
	<b>OPS</b>	x1 PC Slot
<b>OUTPUT</b>	<b>HDMI</b>	x1
	<b>Audio</b>	x1 (Earphone out)
	<b>SPDIF</b>	1(optical)
	<b>RS232</b>	x1
<b>LAN</b>	<b>RJ45</b>	x1
<b>USB</b>	<b>Type A</b>	USB 2.0 x3 USB 3.0 x3
	<b>Type B</b>	x2, for touch
<b>SPEAKERS</b>	<b>SPEAKERS</b>	12Wx2
<b>Camera plate on top for screw-in webcam installation</b>	<b>Camera plate on top for screw-in webcam installation</b>	Yes
<b>COMPATIBILITY</b>	<b>HDMI</b>	3840x2160
<b>USB SUPPORTED FILE FORMAT</b>	<b>USB SUPPORTED FILE FORMAT</b>	Picture - BMP, JPEG, PNG,GIF
		Video - Codec: H.263, H.264, MJPEG, MPEG2, MPEG4, RV30/40, VP6, Xvid-ASP

Container: 3GP, ASF, ASX, AVI, FLV, M4V, MKV, MOV, MP4, MPG, MPEG, RMVB, TS  
H.265

Audio -

Codec: AAC, ALAC, FLAC, MPEG 3, Vorbis, WAV, WMA

Container: AAC, APC, FLAC, M4A, MP3, OGG, WAV, WMA

<b>Bundle Software</b>	<b>Basic Annotation Software</b>	myViewBoard for android
	<b>Pro Annotation Software</b>	myViewBoard for windows (Embedded in Windows Slot-in PC)
	<b>Wireless Presentation with Touch Feedback: Viewboard Cast</b>	ViewBoard Cast
<b>Special Features</b>	<b>All-in-one USB port (combine Windows/Android USB port; no need to distinguish them anymore)</b>	Front "SmartPort USB" to all channels.
	<b>Simple LAN sharing between IFP and slot-in device</b>	Yes
<b>Power</b>	<b>Voltage</b>	100-240VAC +/- 10% Wide Range
	<b>Consumption</b>	171 (Typ.) < 0.5 W ("Off")
<b>ERGONOMICS</b>	<b>Wall Mount (VESA® )</b>	800 x 600
<b>OPERATING CONDITIONS</b>	<b>Temperature (° C)</b>	0°C to 40°C
	<b>Humidity</b>	10% ~ 90% RH non-condensing
<b>DIMENSIONS (W x H x D)</b>	<b>Physical (inch / mm)</b>	88.4 x 52.1 x 3.6 in / 2245 x 1323 x 91 mm
	<b>Packaging (inch / mm)</b>	97.8 x 58.8 x 14.8 in / 2483 x 1493 x 376 mm
<b>WEIGHT</b>	<b>Net (lb / kg)</b>	223.77 lb / 101.5 kg
	<b>Gross (lb / kg)</b>	306 lb / 138.8 kg
<b>REGULATIONS</b>	<b>REGULATIONS</b>	FCC, cTUVus
<b>Energy Star version</b>	<b>Energy Star version</b>	ES8.0
<b>EEL rating</b>	<b>EEL rating</b>	A++
<b>PACKAGE CONTENTS</b>	<b>PACKAGE CONTENTS</b>	1. Power cable(3 meters) x 4 2. Remote control 3. USB cable(3 meters) 4. Touching pen x 2 5. Quick Start Guide 6. RS232 adapter 7. Clamp x 5 8. Plate 9. Screw x 8 10. HDMI cable
<b>Compatible Slot-in PC</b>	<b>Compatible Slot-in PC</b>	VPC14-WP series VPC10-WP series VPC15-WP series VPC16-WP series VPC17-WP series